

DTT-50-Z



DTT SERIES has optional push to talk PTT handset



DTR-61-Z with armored cord



DTR SERIES has volume control handset

DT RANGE OF TELEPHONES

Guardian's DT RANGE are desk and wall mounted industrial telephones designed to provide safe, reliable communication in industrial areas that are prone to harmful environments, where consumer phones are not suitable. Dust and Corrosion resistant.

DTT-Z/DTR-Z SERIES OF TELEPHONES

Guardian's DTT-Z/DTR-Z SERIES ATEX-IEC certified telephone products provide safety and protection in atmospheres where a mixture of air and flammable substances in the form of gas, dust, vapor or mist are present frequently, continuously or for long periods.

Guardian Telecom ATEX-IEC certified equipment delivers safe, reliable communication in hazardous areas that are prone to high humidity, chemical vapors, dust and physical abuse.

DTT-Z/DTR-Z SERIES Industrial Desk / Wall Telephones - Zone 1

DTT-Z/DTR-Z SERIES INDUSTRIAL ANALOG HAZARDOUS TELEPHONES

- DTT-50-Z - Silicone Keypad/Handset/Heavy duty Curly Cord.
- DTT-50-Z-PTT - Silicone Keypad/Handset/Heavy duty Curly Cord/with Push to Talk Handset
- DTT-60-Z - Silicone Keypad/Handset/Armored Cord.
- DTR-51-Z - Direct call ringdown/Volume control Handset/Heavy duty Curly Cord.
- DTR-61-Z - Direct call ringdown/Volume control Handset/Armored Cord.

FEATURES and BENEFITS

- ATEX Zone 1, Zone 21 approved – T5 & T6 rated.
- Wide temperature range from -22°F to +140°F (-30°C to +60°C).
- IP66, static dissipative, high impact thermoset industrial housing and handset.
- Reversible base for desktop or wall mount configurations.
- Audio modes – handset and hands-free speaker phone or optional headsets (DTT only).
- Optional Push To Talk (PTT) switch in handset to manually enable microphone (DTT Only).
- Corrosion resistant hardware.
- Noise canceling microphone.
- Self resetting fuse prevents damage to the electronic circuits in the event of a high voltage spike on the telephone line.
- Magnetic reed hook switch to reduce parts subject to wear.
- Factory set to tone (DTMF) Operation.
- Pulse dialing can be software configured in the field, 40:60 or 33:66.
- Removable handset retainer latches on cradle.
- Urethane coated watertight silicon keypad on DTT-Z models.
- Link, Release, Redial and Flash keys on DTT-Z models.
- Hearing-aid compatible (HAC) receiver.
- Receiver Volume Control provides user with a 16 dB range.
- Ergonomic heavy duty handset.
- Heavy duty coil cord on DTT-50-Z and DTR-51-Z or armored cord on DTT-60-Z or DTR-61-Z.
- Built in ring detect relay to switch up to 240V @ 5 amps.
- DTT-Z models feature a back lit LCD display – 2 line x 16 character: English, French or Spanish.
- DTT-Z models – 20 number memory including 10 single quick dial numbers.
- Programmable auto hang-up timer.
- Two M20 and one M12 gland entries.
- Field repairable by authorized personnel.
- Does not require external power – operates on telephone line power.

APPLICATIONS

Chemical Plants
Fueling Stations
Fertilizer Plants
Missile Silos
Refineries
Paint Manufacturing
Terminals

Oil & Gas Metering Facilities
Munitions Storage Depots
Breweries and Distilleries
Tanker and Tanker Depots
Petrochemical Plants
(LNG) Liquefied Natural Gas
Sewage Treatment Plants


Offshore Drilling Rigs
Bulk Loading Stations
Land-based Drilling Rigs
Defense Installations
Gas Plants
Mines
and more . .



tough. trusted. true.



OVERALL DIMENSIONS

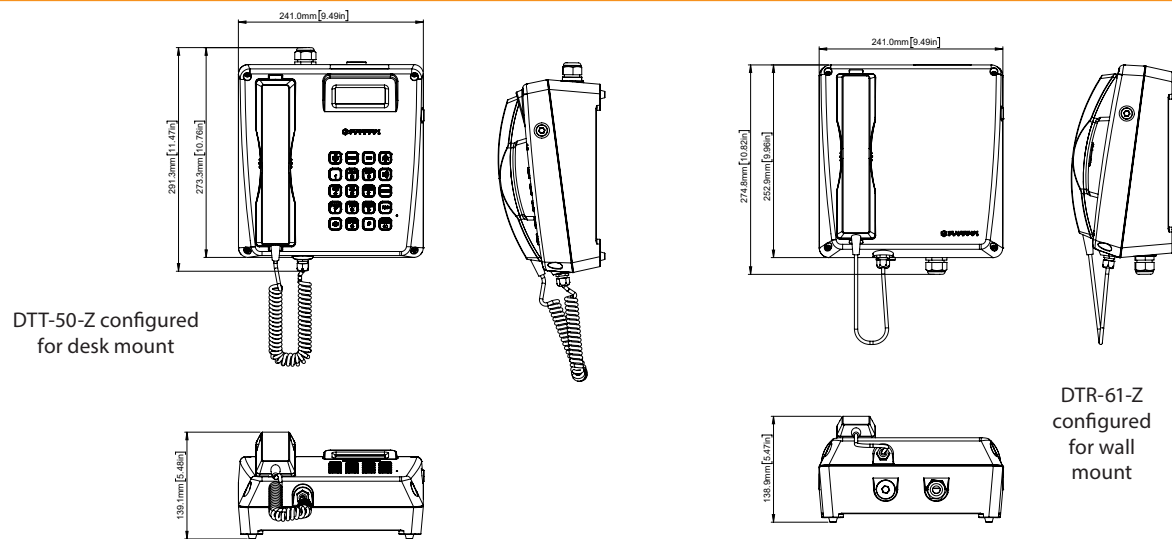

DTT-Z Zone 1 Hazardous Area Telephones • DTR-Z Zone 1 Hazardous Area Ringdown Telephones

ENGINEERING SPECIFICATIONS

ELECTRICAL PERFORMANCE

Audible Range Frequency Response	300 - 3400 Hz
Hands Free Speaker Output on DTT-Z Models (Max @ 1KHz)	~85dB @ 1 Meter
Transmit Objective Loudness Rating (TOLR)	Nominal -38.5 +/- 3 dB
Receiver Volume Adjustment on DTT-Z Models	8 Steps, 2 dB/Step
Receiver Objective Loudness Rating (ROLR)	Nominal 50 +/- 3 dB
– receiver volume at maximum	42 +/- 3 dB
– receiver volume at minimum	58 +/- 3 dB
Quick Dial	10 Registers of 20 Digits Each
Flash	280/600 mSec Timed Disconnect
Redial	31 Digits Maximum
Ringer Output	85 dB @ 1M
Ringer Impedance without Ring Detect Relay	>7K Ohms @25 Hz, 30-90 VAC
	>4K Ohms @ 50Hz, 30-90 VAC
Ringer Impedance with Ring Detect Relay	>4K Ohms @25 Hz, 30-90 VAC
	(RDR Not Recommended @ 50Hz)
Set Impedance	600 Ohms Nominal
Maximum Loop	15Kft (~4,600m) of 22 AWG Wire
North American Configuration1	DTMF 40:60 Pulse @10 PPS
Dialing Method (DTT Models Only)	DTMF or 33:66 Pulse @10 PPS
European Configuration1	Residential and Industrial Areas
Dialing Method (DTT Models Only)	ETSI TBR 38: May 1998 (Acoustics)
1Conforms To	ETSI TBR 21: January 1998 (Telephone Network)

ELECTRICAL REQUIREMENTS

Ringer Sensitivity	40 -100 V, 16 - 25 Hz
Line Voltage	24 - 56 VDC
Loop Current	DTT-Z: 26 - 100 mA, DTR-Z: 20 - 100 mA
Connection Method	Terminal Blocks
Fuse – Main Telephone CCT	250 mA – Auto Reset
Ring Detect Relay Contacts (Fused)	5 Amp 250 VAC Fast Blow

MECHANICAL SPECIFICATIONS

Hook Switch (Cradle Switch) Life	>1 000 000 Operations
Housing Material	High Impact Thermoset Compound
Handset Material	High Impact Thermoset Compound
Net Weight	8.68 lbs (3.95 kg)
Mechanical Dimensions	241mm[9.5"] W x 273mm [10.76"] L x 139mm [5.5"] H
Shipping Weight	10.7 lbs (4.9 kg)
Shipping Dimensions (L x W x D)	16.0" x 10.5" x 9.5" (407 x 267 x 242 mm)
Mounting	Desk or Wall
Microphone	Noise Canceling
Receiver	Hearing Aid Compatible (HAC)
Hardware Material	Stainless Steel
Wiring Access	DTT-Z Models – 2 x M20 & 1 x M12 Cable Gland Entry Points
	DTR-Z Models – 2 x M20 Cable Gland Entry Points

ENVIRONMENTAL

Corrosion Resistant & Dustproof	Full Gasket Faceplate
Operating Temperature	-22°F to +140°F (-30° to +60°C)*
* The LCD on DTT-Z models may become non-responsive in temperatures under -20°C (-4°F)	
Ingress Protection Rating	IP66
Humidity	0 to 95% RH

COMPLIANCE

ATEX – ZONE 1	II 2G Ex e ib mb IIC T6 Gb
II 2G Ex e ib mb IIC T5 Gb	II 2D Ex ib mb tb IIC T85°C Db
II 2D Ex ib mb tb IIC T100°C Db	-30°C ≤ Ta ≤ +45°C
-30°C ≤ Ta ≤ +60°C	ATEX Directive 94/9/EC, RTE directive 1999/5/EC
EC Legislation	EN60079-0:2006, EN60079-7:2007, EN60079-11:2007,
EC Harmonized Standards	EN60079-18:2004, EN60950-1:2006
	TRAC09ATEX21205X and QAN TX091053

EC Certificate No.

Explosion Protected



0518



ORDERING INFORMATION

Warranty: Five years parts and labor

Order No.	Description
P9051	DTT-50-Z Telephone/Silicon Keypad /Volume Control on Keypad/Curly Cord
P9052	DTT-60-Z Telephone/Silicon Keypad/Volume Control on Keypad/Armored Cord
P9053	DTR-51-Z Ringdown Telephone/Volume Control on Handset/Curly Cord
P9054	DTR-61-Z Ringdown Telephone/Volume Control on Handset/Armored Cord

Options

P9066	DTT-50-Z-PTT Telephone/Silicon Keypad /Volume Control on Keypad/Curly Cord/ complete with Push to Talk Handset
OA-DTT-PTT DTT Series	Push To Talk (PTT) handset, disables mic when not in-use.
20C-DTT-Zone	20' (6.1m) Curly Cord – For DTT-50-Z Telephone
20C-DTR-Zone	20' (6.1m) Curly Cord – For DTR-51-Z Ringdown Telephone
Headsets	Contact Guardian for Details

Distributed by:



GUARDIAN TELECOM, a division of CIRCA ENTERPRISES INC.
Calgary, Alberta, Canada
Telephone: 403 258 3100 Facsimile: 403 255 2595
1 800 363 8010 (North America)
info@guardiantelecom.com | www.guardiantelecom.com

Circa