



P-350WBX

The P-350WBX (AC current) Vibratone® horn produces sound by the electro-mechanical vibration of a stainless steel diaphragm.

The horn mechanism with diaphragm is attached to the grille. The water- and dust-tight backbox is ideal for indoor or outdoor use.

The Model P-350WBX is available in 120 or 240VAC for 50/60Hz. Its sound output level is 100dBA nominal at ten feet (110dBA @ 1 meter).

This hazardous location horn accommodates surface, flush or semi-flush mounting on walls, panels, and in cabinets.

The P-350WBX features a die-cast zinc housing with a corrosion-resistant polyurethane finish. The rugged outer grille resists vandalism without reducing sound output. The P-350WBX is fused and utilizes a terminal block connection. The P-350WBX is approved for Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; and Class III.

Capable of producing coded blasts or sustained tones, Federal Signal's Vibratone horns are excellent for general alarm, start/dismissal, coded paging and process control signaling in areas where their sound output exceeds ambient noise levels. Compact size and a variety of installation options make them ideal for institutional use.

Division 2 Vibrating Horn

- Rated for Class I, Division 2; Class II, Division 2; Class III
- Available in 120VAC and 240VAC
- Effective range of 200 feet
- For coded or sustained tones
- Produces 100dBA @ 10' (110dBA @ 1m)
- Type 4X enclosure
- UL and cUL Listed and CSA Certified
- Five Year Warranty

Models

P-350WBX-120

Voltage	Operating Current	Decibels @	
		10'	1m
120VAC 50/60Hz	0.18 amps	100	110

P-350WBX-240


Voltage	Operating Current	Decibels @	
		10'	1m
240VAC 50/60Hz	0.09 amps	100	110



FEDERAL SIGNAL
Safety and Security Systems / Industrial

Guardian Telecom is proud to be a supplier of Federal Signal loudspeakers. Federal Signal brings decades of specialized industry and application experience to safety, security and effective communications for the most hazardous environments and demanding applications. For off the shelf stock items to tailored products, contact a Guardian sales representative to discuss your specific project needs and the equipment that will meet your demands.

The Manufacturer reserves the right to alter specifications without notice.

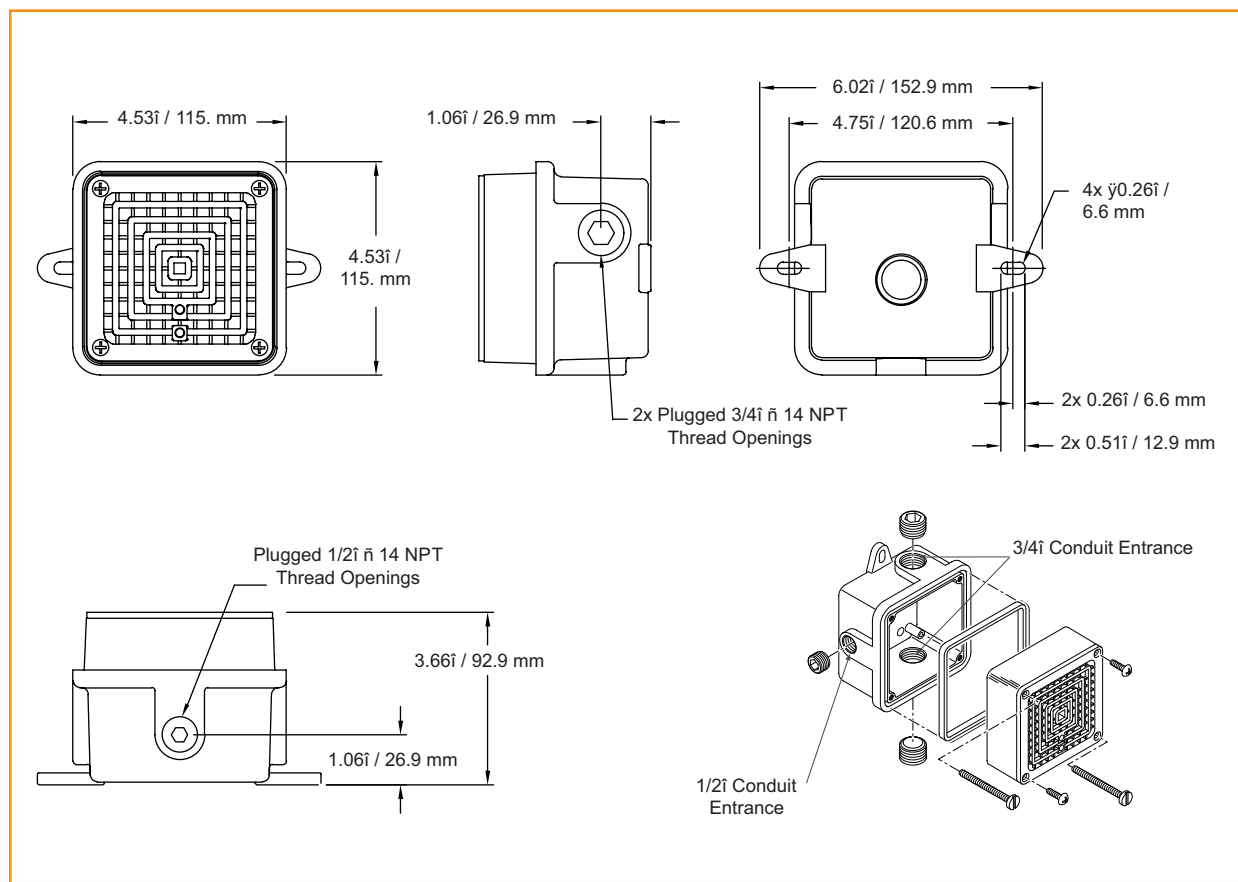

Specifications

Operating Temperature:	-65°F to 150°F (-54°C to 66°C)
Net Weight:	2.7 lbs (1.2 kg)
Shipping Weight:	2.8 lbs (1.2 kg)
Height:	4.53" (115.0 mm)
Depth:	3.66" (92.9 mm)

Replacement Parts

Description	Part Number
Volume Control Kit	K8435663B
Coil, 120VAC (350 Horn only)	KFC1516C

The Manufacturer reserves the right to alter specifications without notice.

Ordering

When ordering specify model and voltage.