


Cabinet Loudspeakers

P-B-406(T)

C: 0.5 W

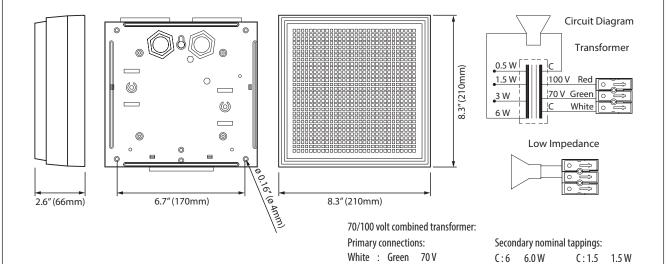


8 ohm version available

Sound pressure levels at 1W/1m w/P6-15B

100 V

White: Red

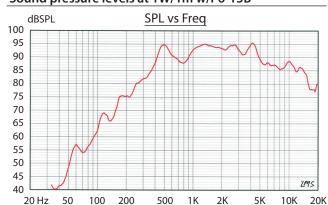

C:3

3.0 W

Specifications

Material / Color ABS/ Light grey Screws and keyhole Mounting Termination Spring clamp Weight 2.42 lbs (1.1 kg) IP-rating (UL Equivalent) Max. / min. amb. temp 194 °F / -4 °F (90°C / -20°C) Rated / max. power 6W/8W SPL 1W/1m 92 db SPL rated power 98 db Effective freq. range 180 - 14000 Hz Dispersion (-6dB) 1kHz / 4kHz 170°/50° **Options** Impedance, color, label

Many DNH products are available in different colors, impedances and power ratings.

Industrial Speakers



Guardian Telecom is proud to be a supplier of the full line of DNH loudspeakers. Since 1946 DNH has been a leading manufacturer of one of the world's largest high quality range of loudspeakers for industrial and commercial applications. For off the shelf stock items to tailored products, contact a Guardian sales representative to discuss your specific project needs and the equipment that will meet your demands.







Installation, Operation and Maintenance Procedures

- Remove backplate by bending back two sides of cabinet.
- Screw the backplate to wall or ceiling.
- Lead cable through a cable entry, connect to terminal (70 V or 100 V and select required tapping in to the transformer.
- Clip on the cabinet to the backplate.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.



The Manufacturer reserves the right to alter specifications without notice.



