





Horn Loudspeakers

PLASTIC HORNS

P-HP-15(T)

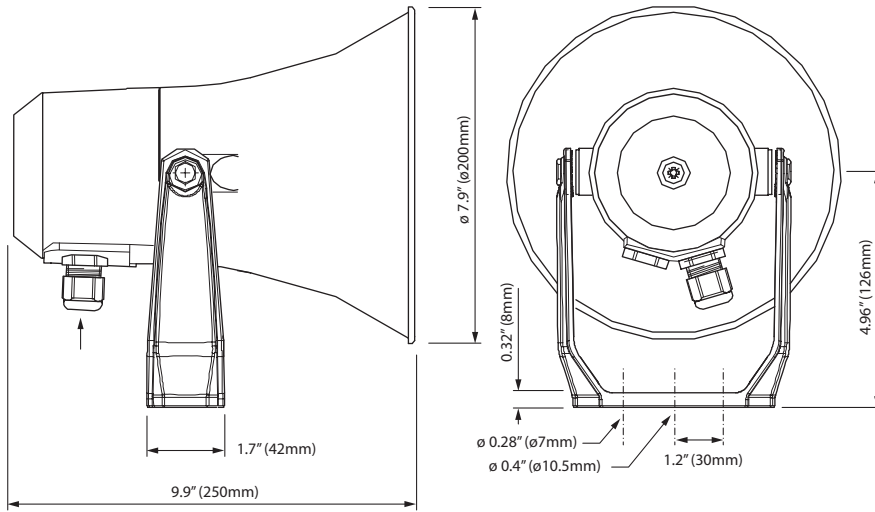


70/100 volt combined transformer:  
 Primary connections:  
 White : Green 70 V  
 White : Red 100 V  
 Secondary nominal tapings:  
 C:4 15.0 W    C:2 4.0 W  
 C:3 7.5 W    C:1 2.0 W

8 ohm version available

### Specifications

Material / Color	ASA / RAL 7035
Mounting	Bracket
Termination	Inside screw connections
Weight	3.8 lbs (1.7 kg)
IP-rating (UL Equivalent)	67
Max. / min. ambient temperature	194 °F / -58 °F (90 °C / -50 °C)
Rated / max. power	15 W / 20 W
SPL 1W/1m	108 dB
SPL rated power	118 dB
Effective freq. range	330 – 8000 Hz
Dispersion (-6dB) 1kHz / 4kHz	130° / 35°
Options	Impedances, colors, labels, steel bracket

### Sound pressure levels at 1W/1m P5/15T

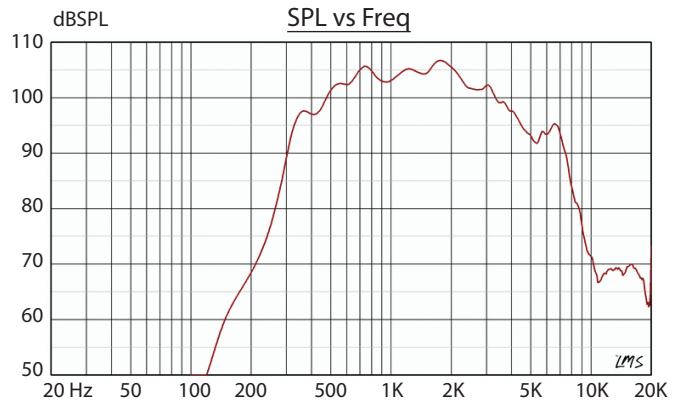

Many DNH products are available in different colors, impedances and power ratings.

Industrial Speakers



ISO 9001 Certified

Guardian Telecom is proud to be a supplier of the full line of DNH loudspeakers. Since 1946 DNH has been a leading manufacturer of one of the world's largest high quality range of loudspeakers for industrial and commercial applications. For off the shelf stock items to tailored products, contact a Guardian sales representative to discuss your specific project needs and the equipment that will meet your demands.



tough. trusted. true.



### Installation, Operation and Maintenance Procedures

- Fasten loudspeaker to wall/ceiling with two screws through foot bracket.
- Remove lid by 1 screw, lead cable gland, select required tapping and connect to terminal 70 V or 100 V .
- To change the position of the loudspeaker adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- **Do not** open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.



The Manufacturer reserves the right to alter specifications without notice.